


# XC-373




**The new XComp fanless series powered by Intel® J6412. With the maximum optional I/O configuration, XComp is a perfect choice for the massive I/O port and power supply requirements of a retail point of sale pc. XComp can also be configured with only the essential I/O and become a perfect fit as a backend server pc.**

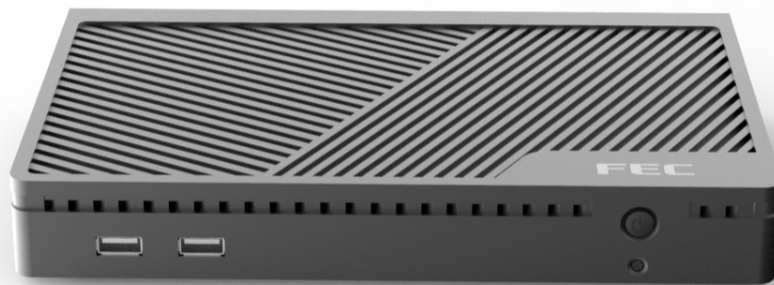

**Compact**  
*While Unlimited*

**XComp Series**  
**XC-373**

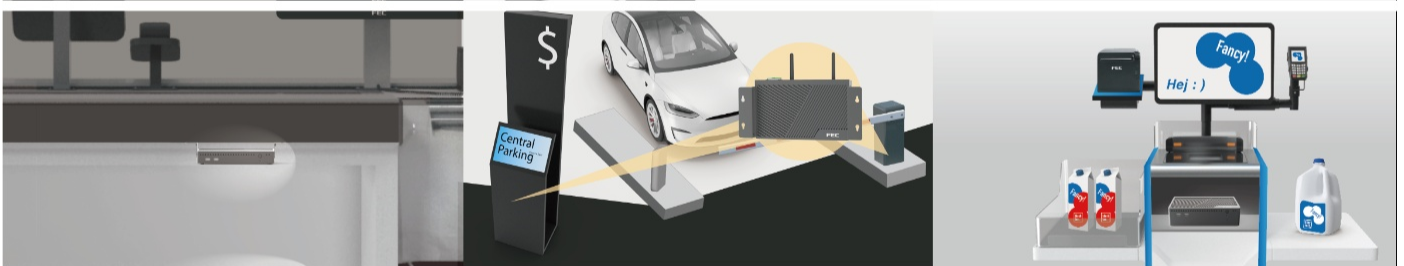

**Unseen**  
*but Under Control*

**Easy maintenance**  
*without distance*

**Rich IO Connections**  
*versatile possibilities*



**Easy Mounting**

**One Cable Solution**

**Well Organized Desktop**




Desk-Mounting Bracket


Smart-DD Monitor XM-3010W / XM-3015 / XM-3015W

Power Adaptor Integrated (Optional)



# XComp Series XC-373 SL SPECIFICATIONS




Model	XC-373 SL			
Processor	Intel® Celeron® Processor J6412			
Memory	4GB Standard, Max 32GB (1 x SO-DIMM DDR4)			
Storage	1 x M.2 M Key PCIe GenIII MVMme (Tray,Default) (No Internal Socket Option)			
Wireless	802.11ac Wi-Fi + Bluetooth4.2 (Optional)			
OS	Windows 10 IoT Enterprise	Supported	Drivers	Preloaded
	Windows 11 IoT Enterprise	Supported	Drivers	Preloaded
	Linux	Per Request		
TPM	TPM 2.0: dTPM and fTPM/PTT			
Mounting	VESA 75 x 75 mm			
Certification	FCC / CE Class B / UKCA / ESD 8KV,15KV			
Construction/Color	Aluminum + Metal + Plastic / Galaxy Grey			
Temperature	Operation: 0°C ~ 40°C (32°F ~ 104°F) Storage: -20°C ~ 60°C (-4°F ~ 140°F)			
Front IO Port	2 x USB 2.0			
Rear IO Port	2 x COM (RJ45) 3 x USB 2.0 1 x USB 3.0 1 x Giga LAN 1 x HDMI Port 1 x Smart-DD   1 x DC-IN (19V) 			
Power	19V/64W External Adapter			
Dimensions (W x H x D)	Product: 229 x 32 x 140 mm in Carton: 323 x 222 x 120 mm (12.7 x 8.7 x 4.8 in)			
Weight	Net: 1.2 Kg/2.6 lb Gross: 1.6 Kg/3.5 lb			
Inside the Product Carton	1 x XC-373 SL 1 x Cable COM Port RJ45 8P-DB9 1 x Power Adapter 1 x AC Power Cord			




Copyright © 2024 Firich Enterprises Co., Ltd.  
http://www.fecpos.com  
10 F., No. 75, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City 221432, Taiwan (R.O.C.)



# XC-373 DL SPECIFICATIONS

Model	XC-373 DL		
Processor	Intel® Celeron® Processor J6412		
Memory	4GB Standard, Max 32GB (1 x SO-DIMM DDR4)		
Storage	1 x M.2 M Key PCIe GenIII MVMme (Tray,Default) (No Internal Socket Option)		
Wireless	802.11ac Wi-Fi + Bluetooth4.2 (Optional)		
OS	Windows 10 IoT Enterprise	Supported	Drivers Preloaded
	Windows 11 IoT Enterprise	Supported	Drivers Preloaded
	Linux	Per Request	
TPM	TPM 2.0: dTPM and fTPM/PTT		
Mounting	VESA 75 x 75 mm		
Certification	FCC / CE Class B / UKCA / ESD 8KV,15KV		
Construction/Color	Aluminum + Metal + Plastic / Galaxy Grey		
Temperature	Operation: 0°C ~ 40°C (32°F ~ 104°F) Storage: -20°C ~ 60°C (-4°F ~ 140°F)		
Front IO Port	2 x USB 2.0		
Rear IO Port	1 x Cash Drawer (RJ11) 2 x COM (RJ45) 1 x USB 2.0 3 x USB 3.0 1 x Giga LAN 1 x HDMI Port 1 x Smart-DD  1 x DC-IN (20V)  1 x Smart-IO 		
2nd IO Optional	<b>2nd IO - 1</b>		
	1 x COM (DB9) 4 x USB 2.0 1 x COM (RJ45) 1 x DC-Out 12V		
	<b>2nd IO - 2</b>		
1 x PUSB 24V 3 x PUSB 12V			
<b>2nd IO - 3</b>			
1 x LAN 4 x USB 2.0 1 x COM (RJ45) 1 x DC-Out 12V			
Power	20V/90W 20V/130W External Adapter		
Dimensions (W x H x D)	Product: 229 x 59 x 140 mm in Carton: 323 x 222 x 165 mm (12.7 x 8.7 x 6.5 in)		
Weight	Net: 1.6 Kg/3.5 lb Gross: 2.1Kg/4.6 lb		
Inside the Product Carton	1 x XC-373 DL 1 x Cable COM Port RJ45 8P-DB9 1 x Power Adapter 1 x AC Power Cord		



<sup>1</sup>Optional 2<sup>nd</sup> IO - 2 requires 20V/130W External Adapter

